



Cold Planer - High Flow Heavy Duty

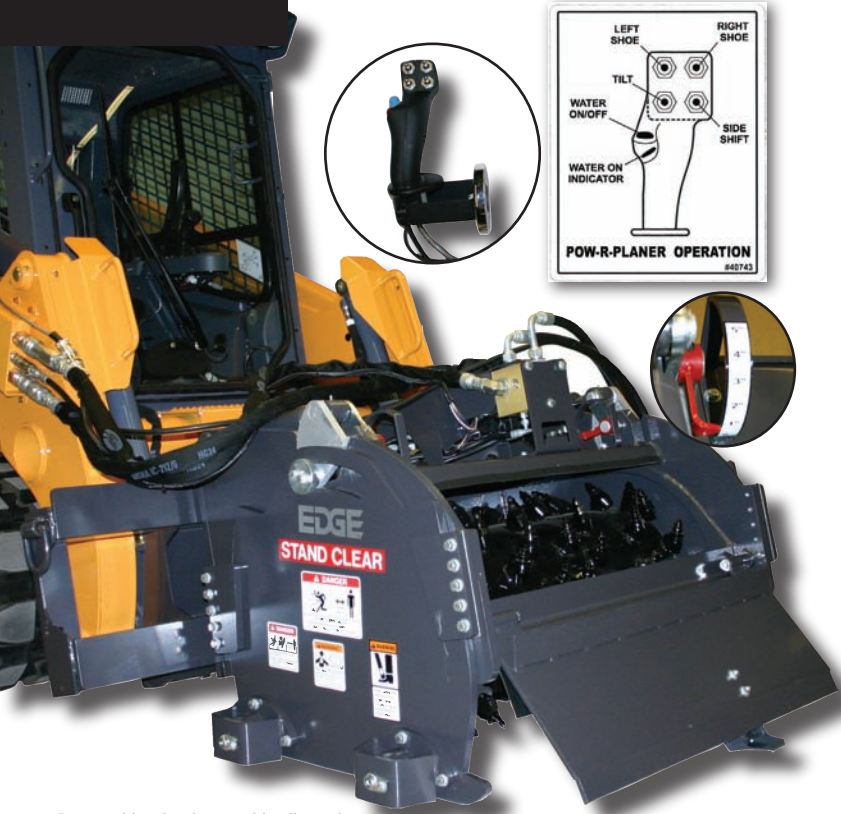

Few attachments can hold up to the daily abuse or meet the heavy-duty requirements of milling attachments. Designed for precise asphalt and concrete cuts, milling attachments are valuable tools for utility crews, cable installation, road construction and maintenance crews.

The **EDGE 40" Cold Planer** is our most advanced model. Features include an electric controller with a magnetic base for easy mounting in the the cab to operate the hydraulic side-shift, tilt, milling depth and optional dust control water kit.

Two depth gauges prominently positioned on either side of the drum housing provide for easy visibility. The high torque is generated by a tough planetary gearbox, and an easy-open access door provides for quick maintenance of the 89 picks on the drum.

The right side wheel assembly is removable, allowing the operator to get close to obstacles or buildings.

This powerhouse attachment has a 40" working width, +/-8° tilt, sideshift 3" to the left and 22" to the right, up to 5" milling depth and requires 36-44 gpm hydraulic flow.

Removable wheel assembly allows the operator to get close to curbs or obstructions.

There is an optional 25-gallon dust control water kit available that mounts to the top of the cab while the pump sprays from ports located on the top of the drum housing.

EDGE Cold Planers are typically used in milling around gutters and manholes, repairing frost heaves, and pavement re-striping. Two Standard-Flow planers are available in 12" and 16" and feature manual tilt/depth control while five High-Flow models in 16", 18", 24", 30" and 36" feature electro-hydraulic tilt/depth control and are single-circuit with 3 hydraulic lines. All EDGE Cold Planers come complete with hoses, hose saver kit, flat-faced couplers and asphalt picks.

- ⊙ **IDEAL FOR MILLING FROST HEAVES, TRAFFIC LANE STRIPES, POTHOLE REPAIR AND MORE**
- ⊙ **OPTIMIZED TOOTH PATTERN TO DELIVER POWER WHERE NEEDED**
- ⊙ **40" WORKING WIDTH**
- ⊙ **+/-8° TILT, SIDESHIFT 3" TO THE LEFT, 22" TO THE RIGHT, 5" MILLING DEPTH**

SPECIFICATIONS

Model	Weight (lbs/kg)	Hyd. Req. (gpm/lpm)	Tilt (degrees)	Max. Depth (in/mm)	No. of Picks	Working Width (in/mm)	Sideshift (in/mm)
CP40	3125/1418	36-44/136-167	+/-8	5/127	89	40/1016	25/635