


Land Clearing Attachment



This heavy duty attachment, designed for brush and stump removal can penetrate up to 3" (76 mm) into the ground and is available in a 48" (1219 mm) width. High-flow hydraulics are required because this unit will need approximately 30-40 gpm (113-151 L/min) to operate. It utilizes rock saw teeth for added durability and to reduce the cost of tooth replacement. Maintenance is simple with no bearings to grease or belts to tighten. Hoses included, couplers sold separately.

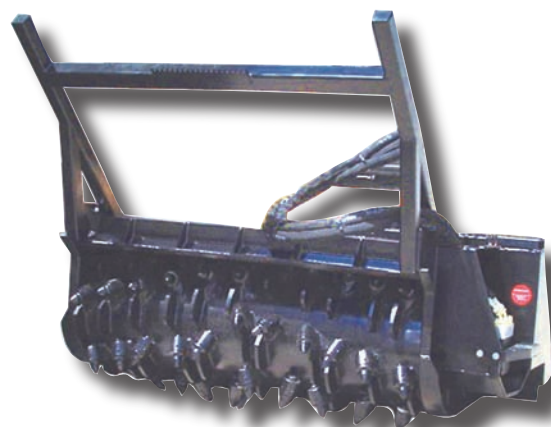

- ⊙ **MINIMUM MAINTENANCE, NO BELTS TO TIGHTEN OR BEARINGS TO GREASE**
- ⊙ **SHREDS STUMPS UP TO 3" BELOW GROUND**
- ⊙ **USES CONVENTIONAL ROCK SAW TEETH**

SPECIFICATIONS

Model	Weight (lbs/kg)	Hyd. Req. (gpm/lpm)	No. of Teeth	Digging Depth (in/mm)	Drum Dia. (in/mm)	Working Width (in/mm)
LC48	2400.0/1088.6	30/113	52	3/76.2	27.25/692	48/1219